


UV自动喷涂线 UV automatic spraying line

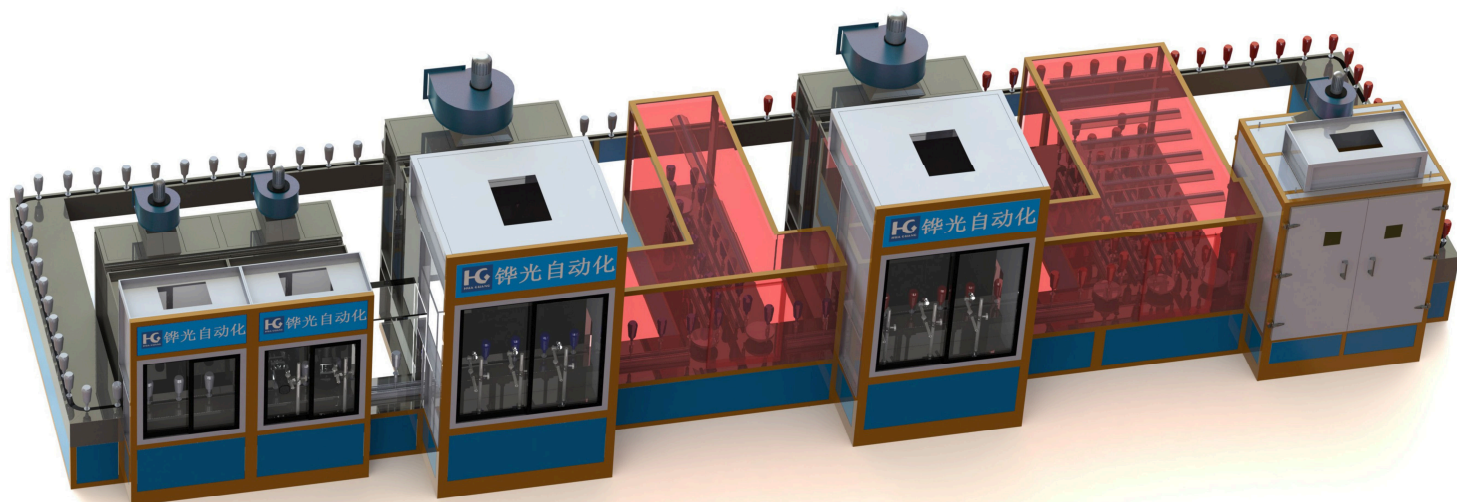





工艺流程Technological process : (分为喷涂、电镀两种divided into two types: spray, electroplate)

喷涂 : 上件→火焰除尘→自动静电除尘→自动喷涂1→表干→自动喷涂2→IR→UV光固化→冷却→下件

Spray : The pieces→Flame dust removal→Automatic electrostatic dust→Automatic spraying1→drying out→Automatic spraying2→IR→UV Curing→Next piece

电镀 : 底漆上件→火焰除尘→自动静电除尘→自动喷涂 (底漆) →IR→UV光固化→冷却→下件→真空电镀→面漆上件→自动静电除尘→自动喷涂 (面漆) →IR→UV光固化→冷却→下件

Electroplate : The pieces (background) →Flame dust removal→Automatic electrostatic dust→Automatic spraying (background) →IR→UV Curing→Next piece→Vacuum Coating→The pieces (looking) →Automatic electrostatic dust→Automatic spraying (looking) →IR→UV Curing→Next piece



应用

本设备为小型工件自动喷涂设备，适用于化妆品包装用的瓶子、盖子、包装盒及其他小规格工件的UV喷涂或UV电镀。
(注：镀膜机需另购)

Application

The equipment is a small workpiece automatic spraying equipment. It is suitable for the use of cosmetics packaging bottles, caps, packaging boxes and other small parts of the UV spray coating and UV plating.
(Note: the coating machine is required)


参数

型号: HG-SPD-P03150-C1
工件尺寸: MAX直径200mm*高度200mm
自转速度: 10-200r/min
工作线速: 2-6M/min
产量: 2000-4000个/H
设备电源: 电压380±10%, 50HZ
体积: L12200×W3750×H2550mm
压缩空气: 0.8MPa/30HP
额定功率: 75KW

Parameter

Model: HG-SPD-P03150-C1
Workpiece size: MAX diameter 200mm*height 200mm
Workpiece rotation speed: 10-200r/min
Line speed: 2-6M/min
Production: 2000-4000pcs/H
Equipment power supply: voltage 380±10%, 50HZ
Volume: L12200×W3750×H2550 mm
Compressed air: 0.8MPa/30HP
Rated power: 75KW

适用产品 Suitable product

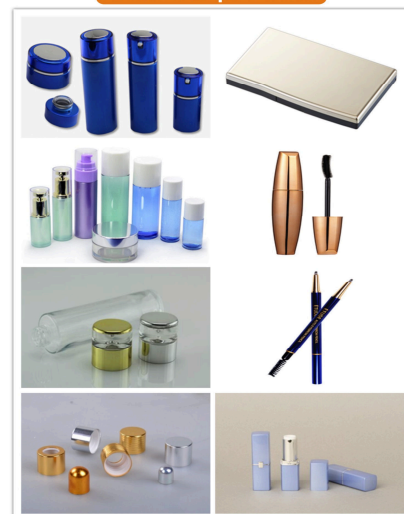

东莞市铨光自动化机械有限公司
Dongguan Huagong Automation Co., Ltd



地址: 广东省东莞市茶山镇寒溪水工业区
Add: Hanxishui industrial area, Chashan Town, Dongguan
Tel: 0769-83266590 13829244002

E-mail: huagong888@163.com
Website: www.huagong.net
Fax: 0769-83222560